



NOTES


- 1. When bolt down grates are specified in the Contract, provide two slots in the grate that are vertically aligned with the holes in the frame. Location of bolt down slots varies among different manufacturers.
- 2. Refer to Standard Specification 9-05.15(2) for additional requirements.
- 3. For frame details, see Standard Plan B-2a.

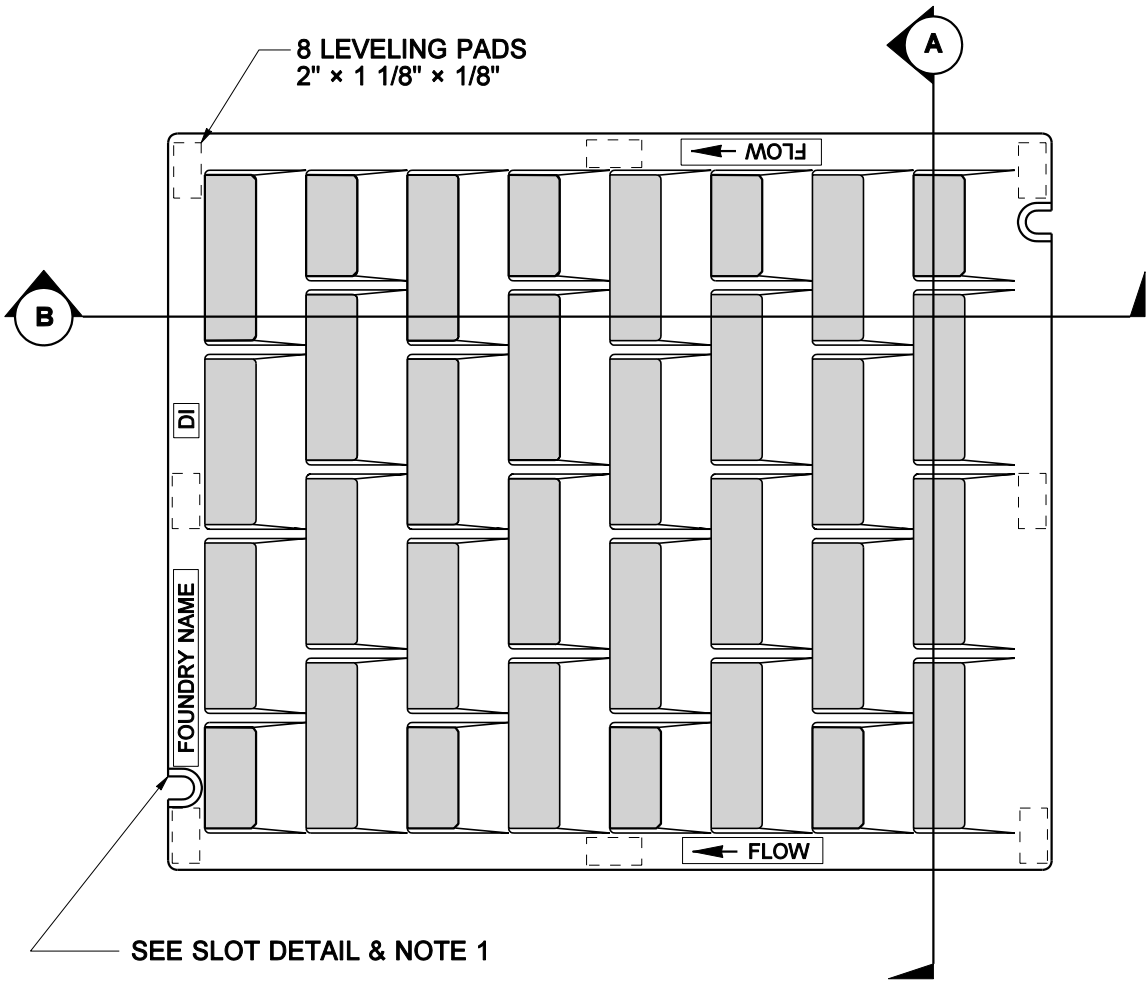


PLAN VIEW

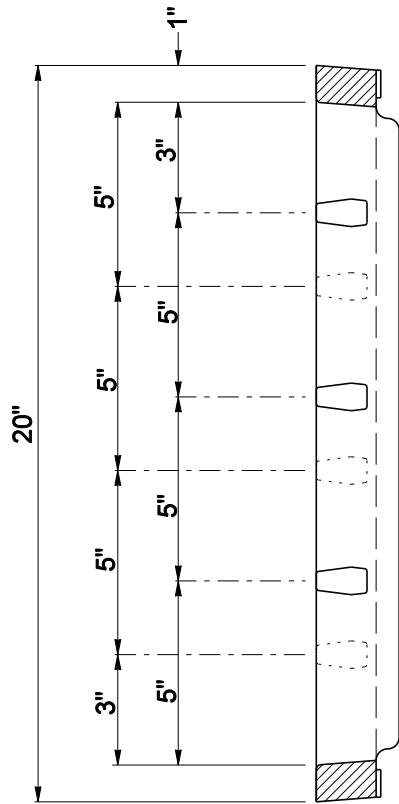

SECTION A

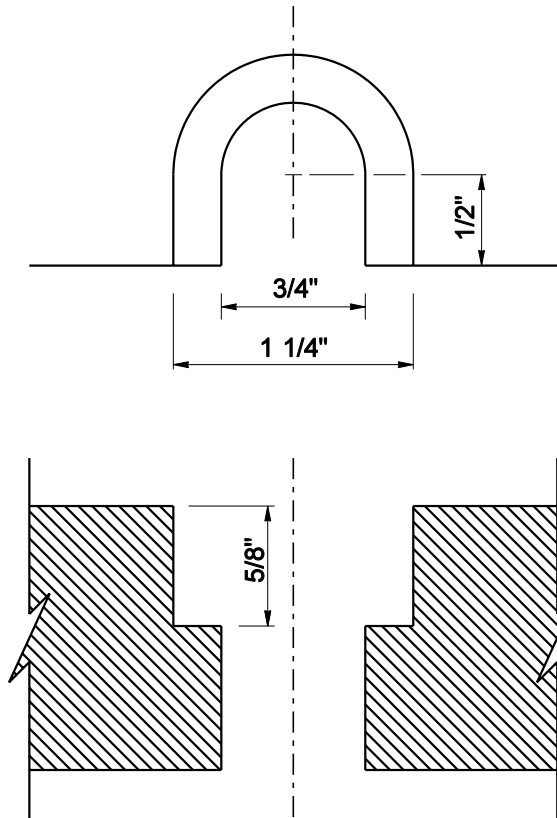

SLOT DETAIL

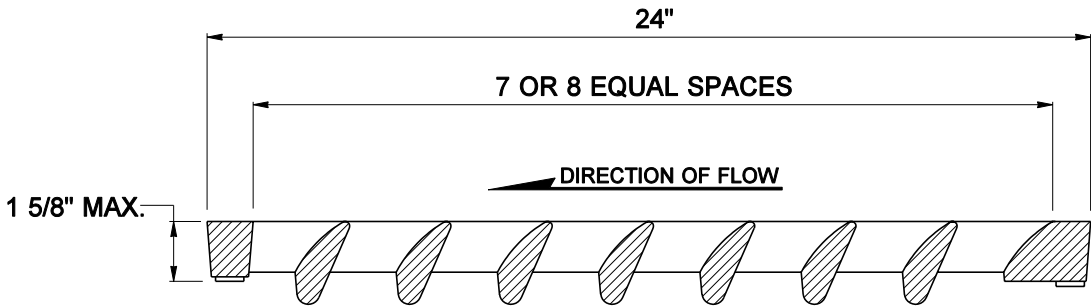

SECTION B



EXPIRES JULY 1, 2003

**VANED GRATE FOR  
CATCH BASIN AND  
CONCRETE INLET  
STANDARD PLAN B-2b**

SHEET 1 OF 1 SHEET

NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT BUT AN ELECTRONIC DUPLICATE. THE ORIGINAL, SIGNED BY THE ENGINEER AND APPROVED FOR PUBLICATION, IS KEPT ON FILE AT THE WASHINGTON STATE DEPARTMENT OF TRANSPORTATION. A COPY MAY BE OBTAINED UPON REQUEST.			APPROVED FOR PUBLICATION	
05/2002		DELETED VANE DETAIL; ADDED SLOT DETAIL; REVISED NOTES.	RG	DATE
DATE		REVISION	BY	DATE
			Washington State Department of Transportation	